


FOOTNOTES

- 1A. May require height adapter A. Part #358300 1B. May require height adapter B. Part #358310 1C. May require height adapter C. Part #358200 1D. May require height adapter D. Part #358100

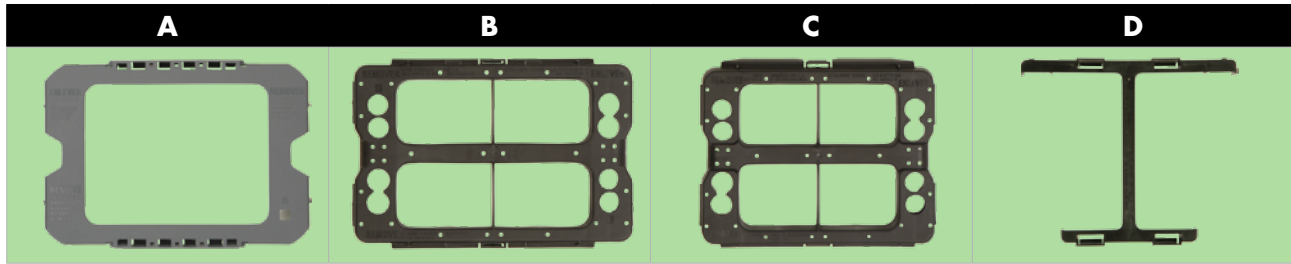

Disclaimer: The only recommended replacements are those batteries indicated in the Applications section of this *Battery Replacement Guide*. With substitutions, installer should check for adequate CCA and reserve capacity and should use best judgment regarding hood clearance, proper fit, cable length, proximity of terminals to under-hood components, and polarity. Interstate Batteries denies any liability for damages as a consequence of not using or misusing this information.

2. Two batteries may be required.
3. Three batteries may be required.
4. Four batteries may be required.
5. Best-fit estimate.
6. Check for height (hood clearance), tray room and hold-down fit. Check clearance before connecting cables.
7. Check polarity and cable length before connecting cables.
8. Not gang vented.
9. Manufacturer's recommended replacement battery shown. May vary from OE battery.
10. Modification of hold-down or heat shield may be necessary.
11. OE battery has flush vents.
12. OE battery has F terminals. Cables must be modified or replaced to use replacement battery.
14. Polarity reversed. Check before installing.
15. Polarity varies in production. Some vehicles require a Group 26R. Check before installing.
16. Requires individual vent caps for proper hood clearance. Do not fit batteries with pod-type vent caps.
19. See manufacturer's service information for retrofit.
20. Some models require Group 91. Check OE battery.
21. Some models use Group 35. Check polarity before installing.
22. Special 12V: 9 5/8" x 6 7/8" x 7 9/16". Check polarity before installing.
23. Special 12V: 10" x 6 1/16" x 8 3/8". Check polarity before installing.
24. Special 12V: 14 15/16" x 6 3/4" x 7 3/8".
25. Special 12V: 8 1/4" x 6 3/4" x 7 1/4".
26. Special 12V: 9 3/4" x 5" x 7 1/2". Vented outside of vehicle.
27. Special 12V: 9 7/8" x 6 11/16" x 3 11/16".
28. Special 12V: 9 9/16" x 6 13/16" x 6 11/16".
30. Special 12V: 9" x 7 1/4" x 7 1/2".
31. Special deep-cycle battery.
33. Valve-regulated AGM battery.
34. Vibration-resistant battery.
35. Without handle bracket.
40. Battery in "active cooling box" with air snorkel to outside of engine compartment.
41. Uses motorcycle battery. No BCI equivalent.
42. Group 27 with type X terminals.
43. OE battery has nonstandard terminal location. May require cable modifications.
44. W/O HBL but with ETR, travel computer cluster or audible message center.
45. Non-BCI Group size.
48. May not meet OE requirements.
49. Battery spacer kit is required on some models.
50. Battery is vented outside of vehicle.
51. Battery may require vent hose.
52. Use with Land Rover adapter AMR3679S, clamp AMR3679, J bolts AMR3681.
53. Use with Land Rover adapter AMR3679S.

ABBREVIATIONS

AC Air Conditioning	DIN Deutsche Industrie Normen	HSC High Swirl Combustion	PS Power Steering
AGM Absorbed Glass Mat	DOHC Dual Overhead Cam	HWS Heated Windshield	PTO Power Take-Off
Alt Altitude	DT Dual Terminal	Hyb Hybrid	Rt Right
Altn Alternate	EFI Electronic Fuel Injection	IHC International Harvester Co.	RWD Rear-Wheel Drive
AT Automatic Transmission	ELWB Extra Long Wheel Base	Ind Industrial	S/C Super Charged
Bat Battery	Eng Engine	L Liter	SEO Special Electrical Option
BCI Battery Council International	ETR Electronic Tuning Radio	Lft Left	SHO Super High Output
Calif California	Ex Except	LPG Liquefied Petroleum Gas	SOHC Single Overhead Cam
Can Canada	Fig Figure	MFI Multi-Port Fuel Injection	TBI Throttle Body Injection
Carb Carburetor	FI Fuel Injection	MT Manual Transmission	V Venturi
CFI Central Fuel Injection	Fla Florida	No. Number	TPPkg Trailer Towing Package
cc Cubic Centimeter	FWD Front-Wheel Drive	OE Original Equip	Turbo Turbo Charged
CCA Cold Cranking Amps (0°F)	HBL Heated Back Light (Rear Window Defroster)	OHC Overhead Cam	w/ With
Comp Compression	HA High Altitude	OHV Overhead Valve	w/o Without
Conv Convertible	HD Heavy Duty	Opt Optional	Wisc Wisconsin
Cyl Cylinder	HO High Output	Pkg Package	2WD 2-Wheel Drive
DES Direct Injection Start	HP Horsepower	PPkg Police Package	4WD 4-Wheel Drive

DI* Distributor Item. See Specifications pages or contact your Interstate Distributor.

